


ULTRASONIC STRAPPING MACHINE

KT-2000US

KT-2000US

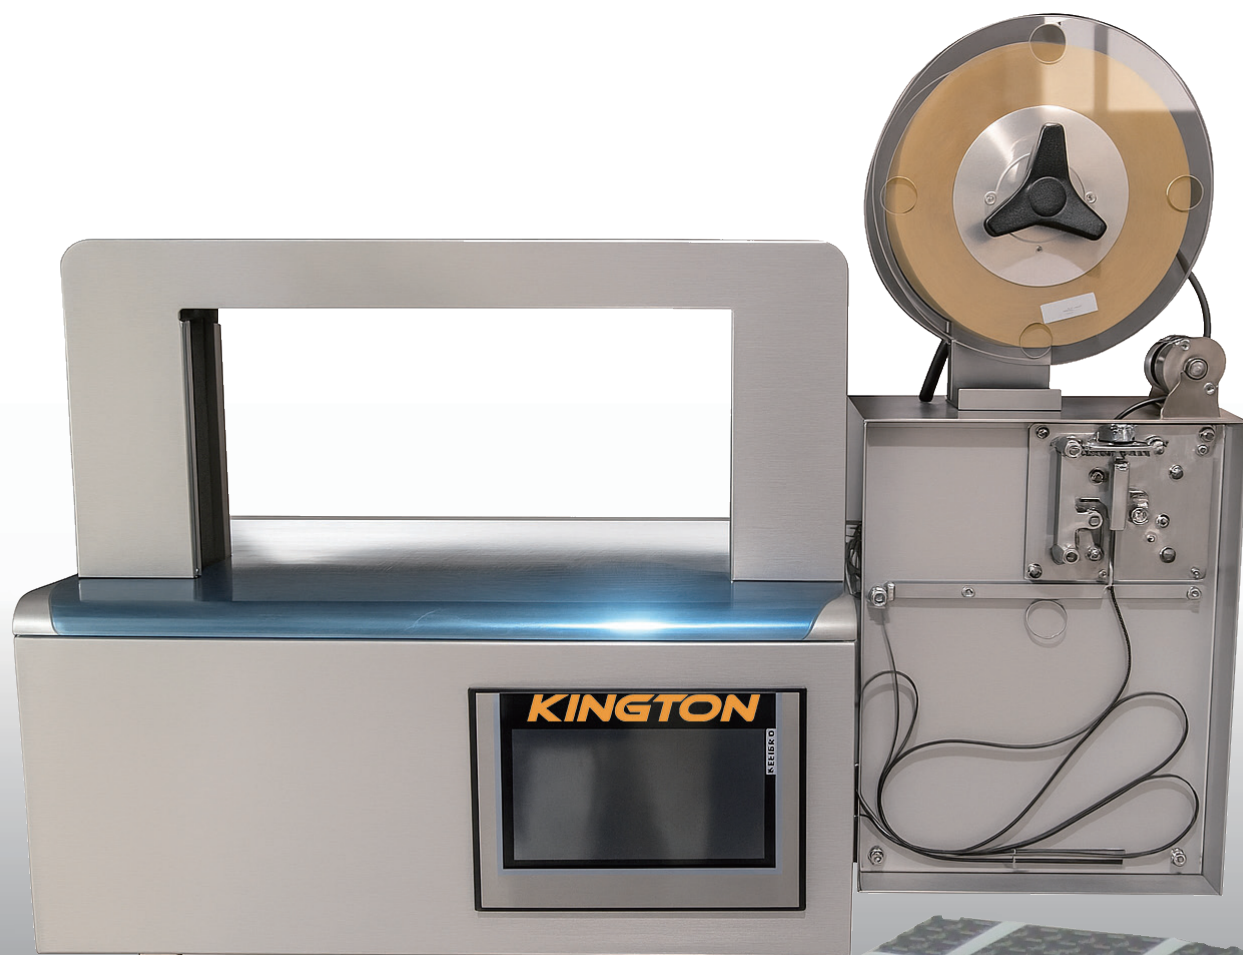

KINGTON Ultrasonic Strapping by Cold-welding precision that's robust, low-maintenance, and energy-efficient.


- ☆ **No Heat, No Smoke – Perfect for cleanrooms.**
- ☆ **Versatile Use – Ideal for IC trays, blister boxes, PCBs.**
- ☆ **Compatible with conductive & anti-static soft PP straps**

KINGTON

Automated Business Systems

Specification	Sealing Technology	Ultrasonic Welding & cold plate pressing sticking
	Warm-up time	Approx 30~60 second after switch on power
	Operating method	Automatic, Manual & Foot Switch (Optional)
	Performance	Up to 30 bandings per minute
	Tension Strength	5N-120N (Adjustable)
	Arch Size	360 (W) x 200 (H) mm
	Table Height	267mm; IC Trays Stop available for efficient packaging.
	Power Supply	Single Phase AC110V/60Hz or 220V/50Hz; 480W
	Dimension	400 (D) x 800 (W) x 520 (H) mm
	Weight	N.W. 28 kgs ; G.W. 30 kgs
	Available Tape Material	Elastic Soft PP Band
	Available Tape	Width: 8mm, Length: 750m, Thickness: 0.35-0.6mm
	Application to	IC trays, Optical Storage Boxes, PCBs, 10bundles money

Optional


**Anti-Static & Conductive Tape**

Conductive PP band offers 10^5 ohms resistivity for fast static discharge and up to 170°C heat resistance—ideal for ESD protection and high-temp baking without deformation.

**Customizable Colored Tape**

Available in a wide range of colors — white, light blue, pink, gold, tawny, rouge, olive. Custom printing of customer logo, text is also supported. Colorful strapping enhances product presentation and value.

*The above-mentioned specialty strapping bands are optional accessories and can be used with the KT-2000US series automatic strapping machines.

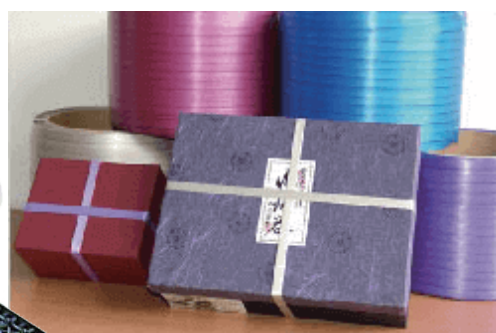

機械の本体やアーチカバーもステンレスにする事で機械自体に静電気が帯電し難く、塗装が落ちて電子部品に付着しないようにしています。
結束見本は、電子チップのケースです。

KINGTON

Automated Business Systems

KINGTON CO., LTD.

5F, No. 194, Sec. 3, Datong Road,
Xizhi District, New Taipei City, Taiwan
TEL / FAX : 886-2-8662-6882

For more information,

