


AUTOMATIC STRAPPING MACHINE

TA SERIES

SPOT TA




Perfect for strapping 10 bundles (1,000 pcs) of banknotes. Conductive soft PP strapping band & anti-static PP soft band are ideal for bundling IC trays, opto-electronic blister boxes, panels, PCBs, and other fragile, static-sensitive products. Premium packaging has never been this easy and efficient!

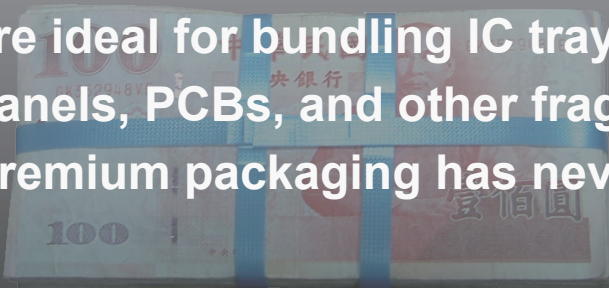

KINGTON
Automated Business Systems

Specification	Sealing Technology	Welding & hot plate pressing sticking
	Warm-up time	Approx 30~60 second after switch on power
	Operating method	Automatic, Manual & Foot Switch
	Performance	Up to 20 bandings per minute
	Tension Strength	7 kg ~10.5 kg (Adjustable)
	Arch Size	360 (W) x 180 (H) mm
	Power Supply	Single Phase AC110V/60Hz or 220V/50Hz
	Power Consumption	135 W (25W Motor x 2)
	Dimension	300 (D) x 760 (W) x 406 (H) mm
	Weight	N.W. 20 kgs ; G.W. 23 kgs
	Available Tape Material	Elastic Soft PP Band
	Available Tape	Width: 8mm, Length: 750m
	Application to	10bundles money, IC trays, Optical Storage Boxes, PCBs

Optional

**Anti-Static & Conductive Tape**

Conductive PP band offers 10^5 ohms resistivity for fast static discharge and up to 170°C heat resistance—ideal for ESD protection and high-temp baking without deformation.

**Customizable Colored Tape**

Available in a wide range of colors — white, light blue, pink, gold, tawny, rouge, olive. Custom printing of customer logo, text is also supported. Colorful strapping enhances product presentation and value.

*The above-mentioned specialty strapping bands are optional accessories and can be used with the Kington TA series automatic strapping machines.



機械の本体やアーチカバーもステンレスにする事で機械自体に静電気が帯電し難く、塗装が落ちて電子部品に付着しないようにしています。
結束見本は、電子チップのケースです。

KINGTON

Automated Business Systems

KINGTON CO., LTD.

5F, No. 194, Sec. 3, Datong Road,
Xizhi District, New Taipei City, Taiwan
TEL / FAX : 886-2-8662-6882

For more information,

